


- » Designed for news coverage and event uplinks
- » Switcher package available for multi camera production
- » Experienced engineers
- » Dual path Ku-band digital and analog
- » Four port antenna with no polarity restrictions
- » All systems 100% redundant
- » Dual Adtec En-80 HD encoders
- » Analog & SDI video routing and monitoring



VLT 3 | “Cheesesteak”

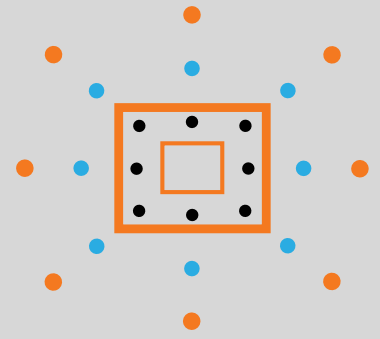

VIDEOLINK

1.800.452.5565

Boston

Philadelphia

Baltimore

www.videolink.tv

based in mid atlantic

- » Full HD capabilities
- » GMC C6500 Chassis
26' L x 8' W x 12' H
- » 2.4 meter Andrews Ku antenna
- » Dual Xicom 400 watt amplifiers with VPC assembly
- » DSS & off-air return systems
- » Dual LNR up-converters
- » Dual Adtec En-80 HD encoders
- » Adtec RD 60 HD decoders
- » Analog & SDI video routing/monitoring
- » Four cell phones & fax machine
- » RTS intercom/IFB system including belt packs & accessories; system can be “dried” to accept a signal from a production truck or production facility
- » On-board 12kw generator
- » Shore power: 100 amp. 190-240 volt single or 3-phase system; Cam-lock or bare-wire connections

when your image is on the line